

UNDERGROUND MINING TYRES

QTYRES



South African distributor :

Q Tyres (Pty) Ltd


113 Diamant Street, Klerksoord, Rosslyn
T : (+27) 12 065 0099 | M : (+27) 82 783 1963
E : quinton@qtyres.co.za
www.qtyres.co.za



Head Office, UAE :

Al Dobowi Tyre Co LLC

PO Box 61348 Jebel Ali, Dubai, UAE
T : (+86) 532 85819981 | M : (+27) 84 602 6959
E : nick.baverstock@aldobowi.ae
www.aldobowi.ae

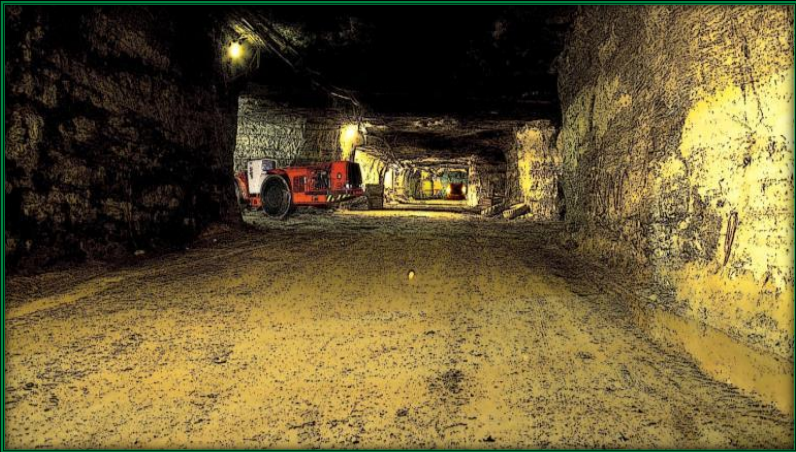

LOAD AND HAUL



50x19.00-25
55x19.00-25
55x19.00-34

49x20.00-25
60x21.00-25
55x20.00-34

17.5 R25

Size	Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	NSD (mm)	Fill Type	TRA code	Max Load (Kg)	Inflation Pressure (Kpa)	Max Speed (Km/h)
17.5R25	★★★	14.00/1.5	445	1399	65	TL-PU	L5	13500	1000	10
49x20.00-25	50	17.00/2.0	506	1236	45	TL-PU	L4	11800	1000	10
50x19.00-25	44	14	490	1254	55	TL-PU	L5	12800	960	10
55x19.00-25	50	14	495	1397	70	TL-PU	L5	11800	830	10
55x19.00-34	50	16	483	1397	62	TL-PU	L5	15000	965	10
55x20.00-34	44	16	507	1365	60	TL-PU	L5	18202	1170	10
60x21.00-25	44	17	528	1542	75	TL-PU	L5	18800	1170	10



HARD ROCK MINING



L5S SLICK

Size	Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	NSD (mm)	TT/TL	TRA code	Max Load (Kg)	Inflation Pressure (Kpa)	Max Speed (Km/h)
9.00-20	16	7.0	255	1015	35	TT	L4S	4750	825	10
12.00-20	28	8.5	315	1185	55	TT	L5S	7200	1000	10
12.00-24	24	8.5	315	1275	60	TT	L5S	7448	925	10
14.00-24	24	10.00W	375	1342	62	TT	L5S	9500	850	10
17.5-25	28	14.00/1.5	445	1400	62	TL	L5S	11800	800	10
18.00-25	32	13.00/2.5	498	1673	80	TL	L5S	15014	760	10
20.5-25	24	17.00/2.0	528	1541	68	TL	L5S	11500	625	10
26.5-25	36	22.00/3.0	710	1798	89	TL	L5S	19000	650	10



COAL SHUTTLE



12.00-20
16.00-25
14.00-24

14.00-20

12.00-20

14.00-24

Size	Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	NSD (mm)	Fill Type	TRA code	Max Load (Kg)	Inflation Pressure (Kpa)	Max Speed (Km/h)
12.00-20	28	8.5	315	1146	32	TT-PU	L3	10980	1000	10
12.00-20	36	8.5	315	1185	55	TT-PU	L5S	10980	1000	10
14.00-20	36	10	375	1230	38	TT-PU	L4	11200	1000	10
14.00-24	32	10.00	380	1350	46	TT-PU	L4	13500	1000	10
14.00-24	32	10.00	375	1342	62	TT-PU	L5S	13500	1000	10
16.00-25	40	11.25/2.0	432	1542	52	TL-PU	L5S	14500	1000	10



DRILLS AND BOLTERS



35x15-15

8.00-20
8.25-20

10.00-15
10.00-20

14.5-15

18L-20

Size	Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	NSD (mm)	Fill Type	TRA code	Max Load (Kg)	Inflation Pressure (Kpa)	Max Speed (Km/h)
35x15-15	32	10.5	353	877	25	TT	L4	5580	1000	10
10.00-15	20	7.5	267	918	56	TT	L5	5300	1000	10
14.5-15	36	11	370	910	54	TT-PU	L5	10660	1000	10
10 x 16.5	14	8.25	264	773	30	TL	L5	2750	725	10
12 x 16.5	14	9.75	310	835	31	TT	L5	3250	660	10
36 x 12.5-20	28	9	310	950	35	TT	L4	7450	900	10
40x12.5-20	32 PR	9	335	1020	35	TT-PU	L4	10980	1000	10
18L-20	32	15	457	1118	32	TL-PU	L4	11158	1000	10
8.00-20	18	6.5	232	932	33	TT	L4	4350	900	10
8.25-20	18	6.5	232	972	33	TT	L4	4800	900	10
10.00-20	28	7.5	278	1073	32	TT	L3	7800	1000	10